

INSTALLATION INSTRUCTION

MHTL-CUBE

Main Data:


Fixture Model	Input Voltage	LED Driver	System Wattage	Dimensions	Power Factor
MHTL-CUBE-35E	120-277VAC 50/60Hz	EUC-036S140ST	35W	42"x3.5"x3.5"	>0.99

Installation:

- 1. This product is to be installed and serviced by a certified electrician.
- 2. The Luminaire should be installed in an area with good ventilation, clear of any corrosive or combustible gases and explosive objects.
- 3. A supply voltage tolerance of +/- 10% is allowable, otherwise the luminaire may not operate correctly or it may become damaged.
- 4. The luminaire must be properly grounded to prevent accidental electrical shocks, and to prevent interference from the electrical ballast affecting the normal operation of the luminaire.

Suspended (Standard)

- 1. The two mounting points of the fixture are 26" apart.
- 2. Attach two anchors to the ceiling. (Spacing as indicated above)
- 3. Screw in metal bases to both anchors, and the aircraft cable connector on the top side of the fixture.
- 4. Screw in the adjustable end of aircraft cable to the metal bases mounted on the ceiling.
- 5. Adjust aircraft cable for desired mounting height and connect power source to the fixture.





Screw in aircraft cable (Top of the fixture)




Screw in the adjustable end of the aircraft cable to the metal bases installed on the ceiling.

Horizontal and Vertical Wall Mount (Option)

- 1. Two "L" Brackets will be provided to mount either on a horizontal or vertical wall.
- 2. For horizontal mounting, place the two mounting points on the fixture 26" apart. To vertically mount, measure the ends of the fixture and mark the wall. See Diagrams below for clarification.
- 3. Install both "L" Brackets using provided wall anchors and counter sink screws.
- 4. Connect power source to the fixture and install fixture on both "L" Brackets using provided screws.

Horizontal Wall Mount

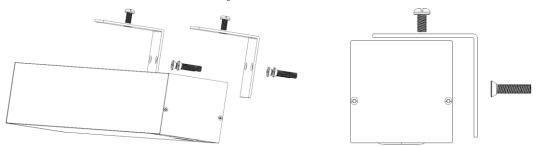




INSTALLATION INSTRUCTION


MHTL-CUBE

Vertical Wall Mount

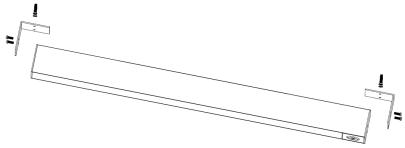

Ceiling Surface Mount (Option)

- 1. Two Surface Mount brackets and screws will be provided.
- 2. The two mounting points on the fixture are 26" apart.
- 3. Install both brackets (Please use appropriate hardware for concrete or dry wall ceiling).
- 4. Connect power source to the fixture.
- 5. Install two provided screws on top of the fixture. Adjust to the desired height and slide into the brackets on the ceiling.

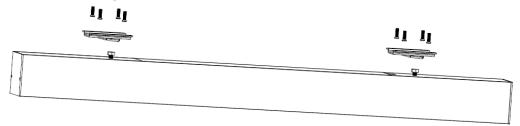

Suspended Continuous (Option)

- 1. Custom plate to connect two fixtures will be provided. Slide in between two adjacent fixtures.
- 2. Please refer to Standard Suspended Mount.

